03M05C7

Instruction Manual

MODEL 80F-15

VOLTAGE DIVIDER

nuc 219

FLUKE

ELECTRONICS FOR INDUSTRY
INSTRUMENTS / COMPONENTS

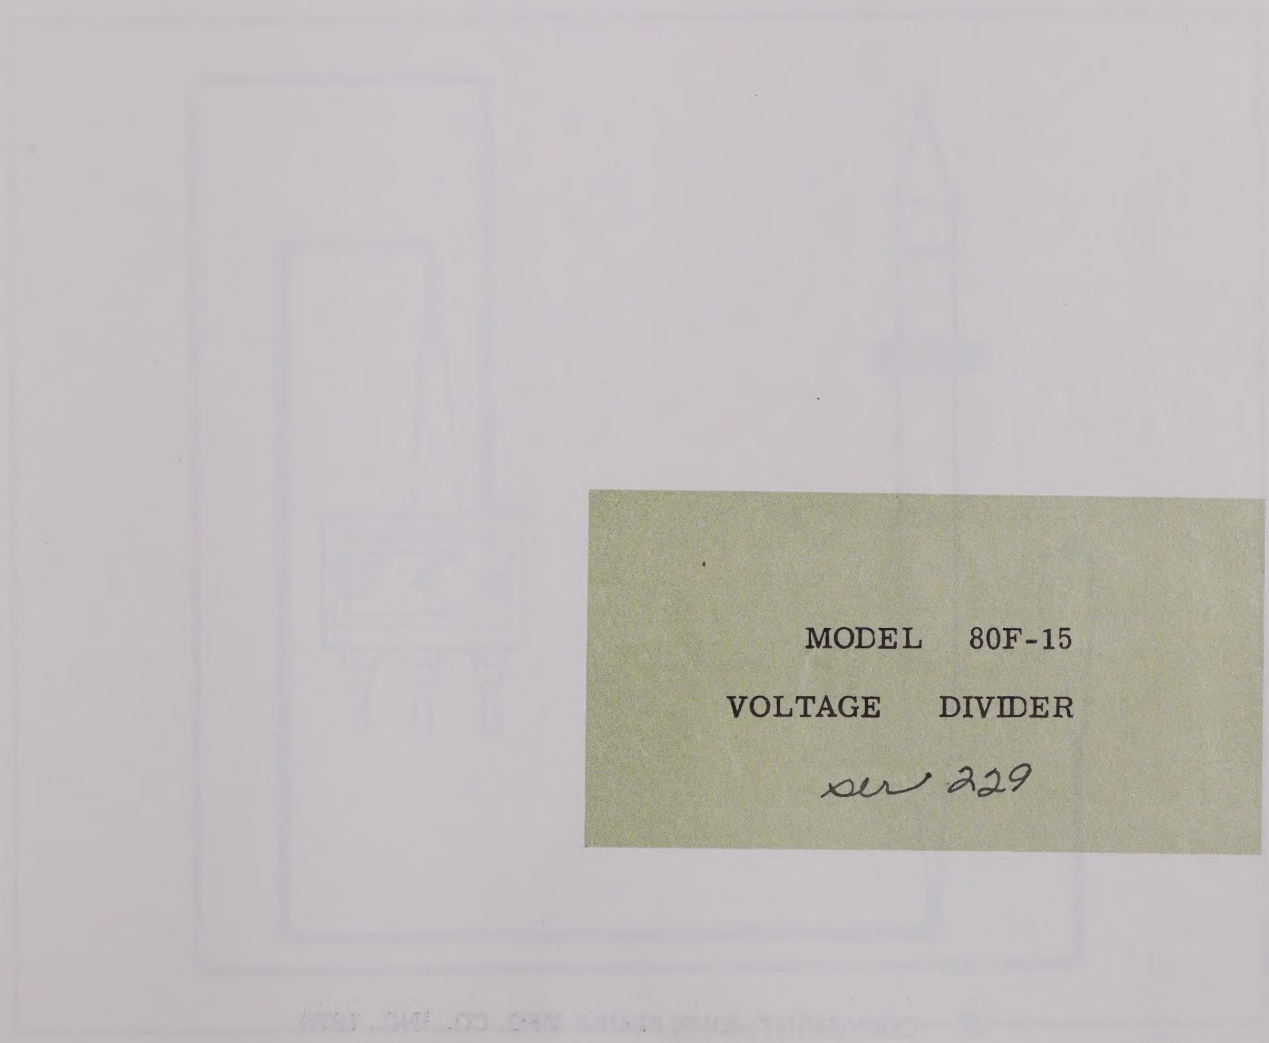

MODEL 80F-15

VOLTAGE DIVIDER

ser 229

© COPYRIGHT, JOHN FLUKE MFG. CO., INC., 1970

ACCESSORY INFORMATION

MODEL 80F-15 VOLTAGE DIVIDER

6-1. INTRODUCTION

6-2. The Accessory Model 80F-15 Voltage Divider allows measurement of up to 15k volts dc to be made using FLUKE 800, 900, and 8000 series voltmeters. Division ratio of this accessory is 1000:1. Accuracy and stability of the division ratio is ensured using special metal film resistors having matched temperature coefficients.

6-3. Physical design of the Model 80F-15 allows direct mating to the input terminals of the FLUKE voltmeters. A high voltage probe facilitates connection to the measurement

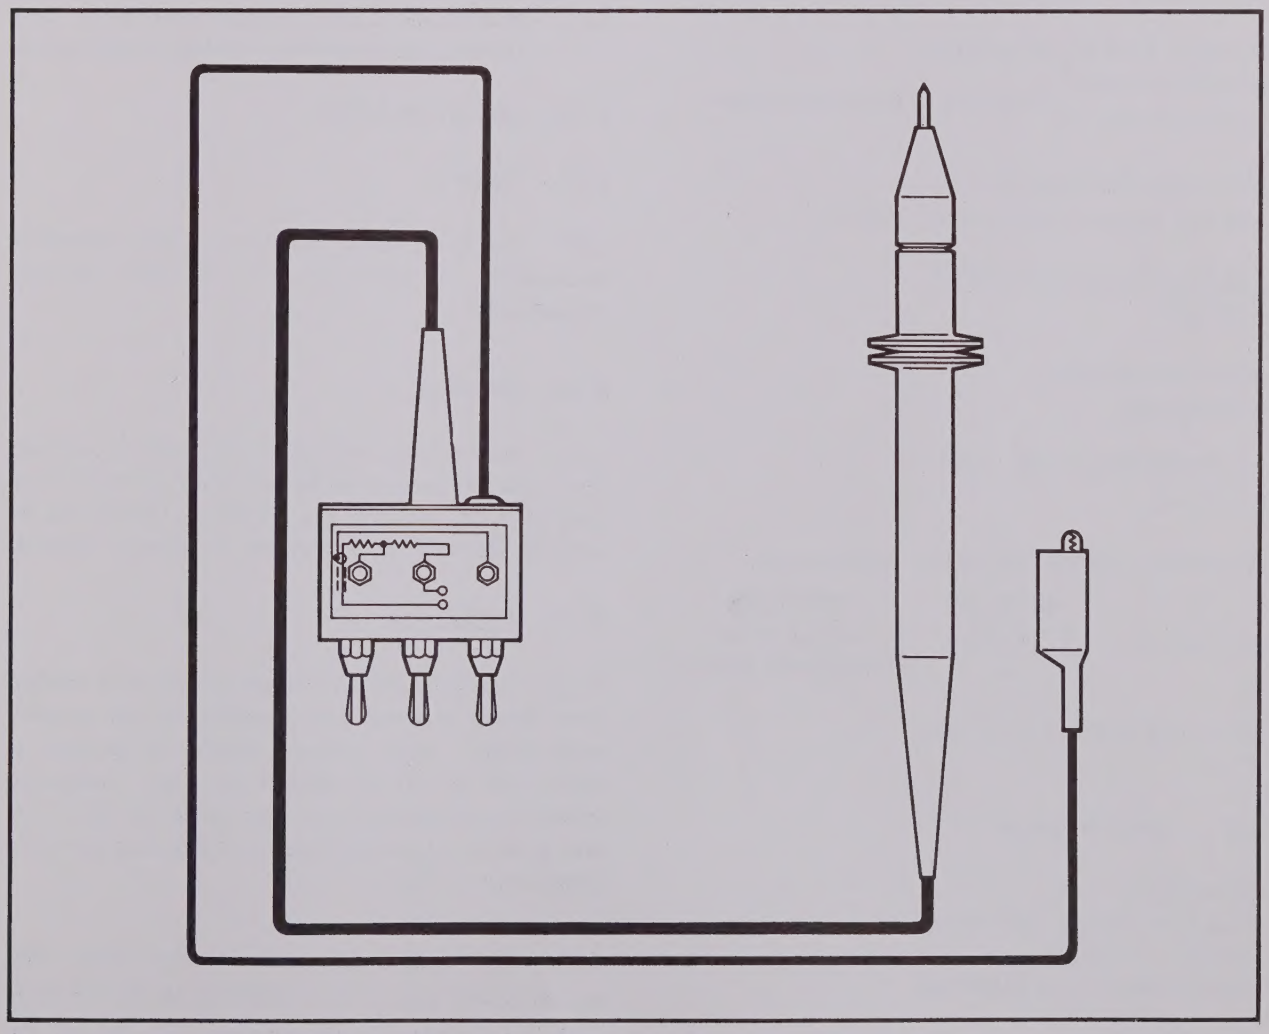

Figure 6-1. MODEL 80F-15 VOLTAGE DIVIDER

source. Maintenance is minimized by encapsulation of the divider components.

6-4. Three versions of the Model 80F-15 are available. The basic Model 80F-15 is used with voltmeters having a 10 megohm input resistance. An (01) Option is provided for voltmeters having an 11 megohm input resistance, and an (02) Option is provided for voltmeters having an infinite input resistance (10^3 megohm or greater) at null.

6-5. SPECIFICATIONS

6-6. Electrical

DIVISION RATIO:
1000:1

RATIO ACCURACY:
±0.01% of input from 1,000 to 15,000 vdc.

RATIO ACCURACY STABILITY:
±0.01% per month
±0.05% per year } Calibrated by internal adjustment

VOLTAGE COEFFICIENT:
Less than 20 ppm total from 0 to 15,000 vdc.

TEMPERATURE COEFFICIENT:
0.001%/°C

INPUT RESISTANCE:
100 Megohms

MAXIMUM INPUT VOLTAGE:
15,000 vdc

REQUIRED VOLTMETER INPUT RESISTANCE:

80F-15	80F-15 (01)	80F-15 (02)
10 Megohms	11 Megohms	Infinite at null (10^3 megohms at greater)

MAXIMUM OUTPUT VOLTAGE:
15 vdc

6-7. Environmental

OPERATING:
Temperature Range – 0°C to 50°C
Humidity – 0 to 80%
Altitude Range – 0 to 10,000 feet

NON-OPERATING:
Altitude Range – 0 to 50,000 feet

6-8. Mechanical

WEIGHT:
24 ounces (680 grams)

DIMENSIONS:
2.725 inches high x 2.69 inches wide x 1.525 inches deep.

6-9. OPERATING INSTRUCTIONS

a. Connect the Model 80F-15 output terminals directly to the INPUT of the FLUKE voltmeter.

b. Select the appropriate dc voltage range on the FLUKE voltmeter.

c. Connect the high voltage probe and ground clip to the high voltage source.

d. Multiply the FLUKE voltmeter indication by 1000 to obtain the magnitude of the high voltage source.

6-10. MAINTENANCE

6-11. General

6-12. The Model 80F-15 requires a minimum amount of maintenance. All that is required is occassional cleaning and calibration.

6-13. Cleaning

6-14. Accumulation of dust or dirt particles between the output terminals of the Model 80F-15 can be removed using clean dry pressurized air. Stubborn particles can be removed following an application of isopropyl alcohol.

6-15. Calibration

6-16. The Model 80F-15 division ratio should be checked every month or every year depending on the accuracy requirement. Ratio accuracy stability is specified at ±0.01% per month and ±0.05% per year. Calibration should be accomplished only after the Model 80F-15 has been in the non-operating state for at least four hours at a temperature of 23°C.

6-17. Test equipment requirements are a stable 1000 volt dc source such as the FLUKE Model 332B Voltage Calibrator and the FLUKE voltmeter. To calibrate the Model 80F-15, perform the following steps:

a. Calibrate the FLUKE voltmeter.

b. Install the Model 80F-15 on the FLUKE voltmeter input terminals.

c. Unscrew the strain relief on the input cable of the Model 80F-15 and remove the front cover.

d. Select the appropriate dc voltage range on the FLUKE voltmeter.

e. Apply 1000 volts dc to the Model 80F-15 high voltage probe.

f. Adjust the variable resistor on the Model 80F-15 for a 1.0 volt dc indication on the FLUKE voltmeter.

g. Remove the voltage from the Model 80F-15 high voltage probe.

h. Install the Model 80F-15 front cover and strain relief.

WARRANTY

The JOHN FLUKE MFG. CO., INC. warrants each instrument manufactured by them to be free from defects in material and workmanship. Their obligation under this Warranty is limited to servicing or adjusting an instrument returned to the factory for that purpose, and to making good at the factory any part or parts thereof; except tubes, fuses, choppers and batteries, which shall, within one year after making delivery to the original purchaser, be returned by the original purchaser with transportation charges prepaid, and which upon their examination shall disclose to their satisfaction to have been thus defective. If the fault has been caused by misuse or abnormal conditions of operation, repairs will be billed at a nominal cost. In this case, an estimate will be submitted before work is started, if requested.

If any fault develops, the following steps should be taken.

1. Notify the John Fluke Mfg. Co., Inc., giving full details of the difficulty, and include the Model number, type number, and serial number. On receipt of this information, service data or shipping instructions will be forwarded to you.

2. On receipt of the shipping instructions, forward the instrument prepaid, and repairs will be made at the factory. If requested, an estimate of the charges will be made before the work begins, provided the instrument is not covered by the Warranty.

SHIPPING

All shipments of John Fluke Mfg. Co., Inc. instruments should be made via Railway Express prepaid. The instrument should be shipped in the original packing carton; or if it is not available, use any suitable container that is rigid. If a substitute container is used, the instrument should be wrapped in paper and surrounded with at least four inches of excelsior or similar shock-absorbing material.

CLAIM FOR DAMAGE IN SHIPMENT

The instrument should be thoroughly inspected immediately upon receipt. All material in the container should be checked against the enclosed packing list. The manufacturer will not be responsible for shortages against the packing sheet unless notified immediately. If the instrument fails to operate properly, or is damaged in any way, a claim should be filed with the carrier. A full report of the damage should be obtained by the claim agent, and this report should be forwarded to John Fluke Mfg. Co., Inc. Upon receipt of this report you will be advised of the disposition of the equipment for repair or replacement. Include the model number, type number, and serial number when referring to this instrument for any reason.

The John Fluke Mfg. Co., Inc. will be happy to answer all application questions which will enhance your use of this instrument. Please address your requests to:

JOHN FLUKE MFG. CO., INC., P. O. BOX 7428, SEATTLE 33, WASHINGTON

SALES & SERVICE REPRESENTATIVES

ALABAMA
HUNTSVILLE
BCS Associates, Inc.
3322 South Memorial Parkway
Tel. (205) 881-6220
Zip 35801

ALASKA
SEATTLE
Instrument Specialists, Inc.
5950 Sixth Ave. South
Suite 106
Seattle, Washington 98108
Tel. (206) 767-4260

ARIZONA
PHOENIX
Barnhill Associates
4900 E. Indian School Road
Tel. (602) 959-2115
Zip 85251

CALIFORNIA
LOS ANGELES
Instrument Specialists, Inc.
1109 S. Central Ave.
Glendale, California 91204
Tel. (213) 245-9404

SAN FRANCISCO
Instrument Specialists, Inc.
2359 De La Cruz
Santa Clara, California 95050
Tel. (408) 244-1505

SAN DIEGO
Instrument Specialists, Inc.
10459 A Rosella Street
San Diego, California 92121
Tel. (714) 453-1833

COLORADO
DENVER
Barnhill Associates
1170 S. Sheridan Blvd.
Tel. (303) 934-5505
Zip 80226

CONNECTICUT
HARTFORD
Instrument Representatives, Inc.
P.O. Box 165
Glastonbury, Connecticut 06033
Tel. (203) 633-0777

FLORIDA
ORLANDO
BCS Associates, Inc.
940 N. Fern Creek Ave.
Tel. (305) 843-1510
Zip 32803

HAWAII
HONOLULU
Industrial Electronics, Inc.
646 Queen Street
Tel. (808) 506-095
Zip 96813

ILLINOIS
CHICAGO
Cozzens & Cudahy, Inc.
9501 W. Devon Ave.
Rosemont, Illinois 60018
Tel. (312) 825-1144

INDIANA
INDIANAPOLIS
Cozzens & Cudahy, Inc.
647 Mulford Crt.
Tel. (317) 244-2456
Zip 46234

MARYLAND
BALTIMORE
Electronic Marketing Assoc.
11501 Huff Court
Kensington, Maryland 20795
Tel. (301) 881-5300

MASSACHUSETTS
BOSTON
Instrument Representatives, Inc.
1046 Massachusetts Avenue
Arlington, Massachusetts 02174
Tel. (617) 646-1034

MICHIGAN
DETROIT
Technitron, Inc.
13657 Grand River Ave.
Tel. (313) 838-7324
Zip 48227

MINNESOTA
MINNEAPOLIS
Cozzens & Cudahy, Inc.
7710 Computer Ave.
Tel. (612) 920-1022
Zip 55435

MISSOURI
ST. LOUIS
Cozzens & Cudahy, Inc.
P.O. Box 10013
Lambert Field 63145
Tel. (314) 423-1234

NEW JERSEY
NEWARK
SBM Associates, Inc.
1519 Stuyvesant Avenue
Union, New Jersey 07083
Tel. (201) 687-8737

NEW MEXICO
ALBUQUERQUE
Barnhill Associates
827 Pennsylvania N.E.
Tel (505) 265-7766
Zip 87110

NEW YORK
NEW YORK
SBM Associates, Inc.
28 Hobby Street
Pleasantville, New York 10570
Tel. (914) 769-1811

LONG ISLAND
SBM Associates, Inc.
528 Old Country Road
Plainview, Long Island 11803
Tel. (516) 433-1421

ROCHESTER
SBM Associates, Inc.
800 Linden Avenue
Tel. (716) 381-8330
Zip 14625

SYRACUSE
SBM Associates, Inc.
138 Pickard Bldg.
5858 E. Molloy Road
Tel. (315) 454-9377
Zip 13211

NORTH CAROLINA
GREENSBORO
BCS Associates, Inc.
1039 E. Wendover Avenue
Tel. (919) 273-1918
Zip 27405

OHIO
CLEVELAND
Technitron, Inc.
23203 Lorain Road
North Olmsted, Ohio 44070
Tel. (216) 734-0960

DAYTON
Technitron, Inc.
1250 W. Dorothy Lane
Tel. (513) 298-9964
Zip 45409

OREGON
SEATTLE
Instrument Specialists, Inc.
5650 Sixth Ave. South
Suite 106
Seattle, Washington 98108
Tel. (206) 767-4260

PENNSYLVANIA
PHILADELPHIA
Electronic Marketing Assoc.
210 Goddard Blvd. – Suite 100
King of Prussia, Pennsylvania
Tel. (215) 248-5050
Zip 19406

PITTSBURGH
Technitron, Inc.
114 Spring Grove Road
Tel. (412) 371-1231
Zip. 15235

TEXAS
DALLAS
Barnhill Associates
Ste. 220
312 N. Central Express Way
Richardson, Texas 75080
Tel. (214) 231-2573

HOUSTON
Barnhill Associates
Suite 332
3810 Westheimer
Tel. (713) 621-0040
Zip 77027

WASHINGTON
SEATTLE
Instrument Specialists, Inc.
5950 Sixth Ave. South
Suite 106
Seattle, Washington 98108
Tel. (206) 767-4260

WASHINGTON, D.C.
Electronic Marketing Associates
11501 Huff Court
Kensington, Maryland 20795
Tel. (301) 881-5300

CANADA

BRITISH COLUMBIA
VANCOUVER
Allan Crawford Associates, Ltd.
721 Aldford Ave.
Annacis Industrial Estate
New Westminister
Tel. (604) 524-1161

ONTARIO
OTTAWA, 3
Allan Crawford Associates, Ltd.
376 Churchill Avenue – Suite 106
Tel. (613) 725-3354

TORONTO
Allan Crawford Associates, Ltd.
65 Martin Ross Avenue
Downsview, Ontario
Tel. (416) 636-4910

QUEBEC
MONTREAL, 8
Allan Crawford Associates, Ltd.
1285 Hodge Street
Tel. (514) 747-9849

INTERNATIONAL REPRESENTATIVES

AUSTRALIA
Elmeasco Instruments
7 Chard Road
P.O. Box 334
Brookvale, N.S.W., Australia 2100

Elmeasco Instruments (Pty.) Ltd.
P.O. Box 213
Mt. Waverley, Vic. Australia 3149

AUSTRIA
Omni Ray AG
Tech. Beratung
Mollardgasse 54
Vienna VI, Austria

BELGIUM
C.N. Rood S/A
30 Rue Leon Frederic
Brussels 4, Belgium

DENMARK
Tage Olsen A/S
1, Ronnegade
Copenhagen, Denmark

FINLAND
Oy Findip AB
Postbox 52025
Helsinki 25, Finland

FRANCE
Radio Equipment Antares
9, Rue Ernest Cognac Q
92 Levallois
Perret, France

HONG KONG
Gilman & Co. Ltd.
P.O. Box 56
Hong Kong, Hong, Kong

ISRAEL
R.D.T. Electronics Engineering Ltd.
P.O. Box 21082
Tel-Aviv, Israel

ITALY
Elettronucleonica s.p.a.
7, P.zza DeAngeli
20146 Milano, Italy

JAPAN
Toyo Trading Co., Ltd.
P.O. Box 5014
Tokyo Japan

Toyo Trading Co., Ltd.
2-38 Junkeicho-dori minami-ku
Osada, Japan

KOREA
M.-C International
I.P.O. Box 1355
Seoul, Korea

MALAYSIA
O'Connor's (Pte) Limited
P.O. Box 1197
Kota, Kinabalu
East Malaysia

O'Connor's (Pte) Limited
P.O. Box 91
Petaling Jaya
West Malaysia

THE NETHERLANDS
C.N. Rood N.V.
Post Office Box 4542
Rijswijk (Z.H.) The Netherlands

Fluke (Nederland) N.V.
Post Office Box 5053
Tilburg, The Netherlands

NORWAY
Morgenstierne & Co. A/S
P.B. 6688 Rodelokka
Oslo 6, Norway

OKINAWA
RYUKYU ISLANDS
Baxter Trading Co.
P.O. Box 26
Koza, Okinawa
Ryukyu Islands

PHILIPPINES
T. J. Wolff
2246 Pasong Tamo
Makati, Rizal
Manila, Philippines

SINGAPORE
O'Connor's (Pte) Limited
Maybank House
Robinson Road
Singapore

SOUTH AFRICA
K. Baker (Pty.) Ltd.
P.O. Box 1257
Johannesburg, So. Africa

K. Baker (Pty.) Ltd.
P.O. Box 3641
Cape Town, So. Africa

K. Baker (Pty.) Ltd.
P.O. Box 2143
Durban, Natal, So. Africa

K. Baker (Pty.) Ltd.
P.O. Box 210
Swazilad, So. Africa

SPAIN
REMA
General Sanjurjo, 18
Madrid, Spain

SWEDEN
Erik Ferner AB
Box 56
161.26 Stockholm-Bromma,
Sweden

SWITZERLAND
Omni Ray AG
Dofourstrasse 56
8008 Zurich, Switzerland

TAIWAN
Heighten Trading Co., Ltd.
P.O. 1408
Taipei, Taiwan

THIALAND
G. Simon Radio Ltd.
30 Patpong Avenue
Suriwong
Bangkok, Thailand

THE UNITED KINGDOM
Fluke International Corp.
Garnett Close
Watford, England
WD2-4TT

WEST GERMANY
Rohde & Schwarz Vertriebs - Gmbh
5000 Koein
Hohe Strasse 160-168
West Germany

Rohde & Schwarz Handels - Gmbh
1000 Berlin 10
Ernst - Reuter - Platz 10
West Germany

Rohde & Schwarz Vertriebs - Gmbh
2000 Hamburg 50
Grosse Bergstrasse 213-217
West Germany

Rohde & Schwarz Vertriebs - Gmbh
7500 Kalsruhe
Kriegsstrasse 39
West Germany

Rohde & Schwarz Vertriebs - Gmbh
8000 Muenchen
Dachauer Strasse 109
West Germany

In Europe contact FLUKE NEDERLAND, N. V., Post Office Box 5053, Tilburg, The Netherlands

List of Factory Authorized Service Centers

ARIZONA

PHOENIX

Arizona Standards Laboratory
4430 N. 19th Ave.
Tel. (602) 264-9351

CALIFORNIA

LOS ANGELES

Instrument Specialists, Inc.
P. O. Box 39908
2870 Los Feliz Place
Tel. (213) 665-5181
TWX: 910-321-3914

COLORADO

BOULDER

Ball Brothers Research Corp.
Standardization Laboratory
Tel. (303) 444-5300
TWX: 910-940-3241

FLORIDA

ORLANDO

BCS Associates, Inc.
P. O. Box 6578
940 N. Fern Creek Ave.
Tel. (305) 425-2764
TWX. 810-850-0185

HAWAII

HONOLULU

Industrial Electronics
P. O. Box 135
646 Queen Street
Tel. (808) 506-095
TWX. 63238

MARYLAND

KENSINGTON

Electronic Marketing Associates
11501 Huff Court
Tel. (301) 946-0300
TWX. 710-825-9645

MASSACHUSETTS

ARLINGTON

Instrument Representatives, Inc.
1046 Massachusetts Ave.
Tel. (617) 646-1034

NEW MEXICO

ALBUQUERQUE

EG & G Standards and Calibration Laboratory
P. O. Box 4339, Station A
933 Bradbury Drive S. E.
Tel. (505) 842-4084

NEW YORK

PLEASANTVILLE

SBM Associates
28 Hobby Street
Tel. (914) 769-1811
TWX. 710-572-2193

ROCHESTER

SBM Associates
800 Linden Ave.
Tel. (716) 381-8330
TWX. 510-253-6145

OHIO

CLEVELAND

Honeywell Metrology Service
1001 E. 55th St.
Tel. (216) 881-0300

FAIRBORN

Honeywell Metrology Service
600 East Dayton Dr.
Tel. (513) 878-2551

TEXAS

GARLAND

Tucker Electronics Company
326 Kirby Street
Tel. (214) 272-3404

HOUSTON

Linear Standards Laboratory
8207 Millet
Tel. (713) 923-2796

UTAH

SALT LAKE CITY

Stabro Laboratory
23 Kensington Ave.
Tel. (801) 467-8011

CANADA

TORONTO

Allen Crawford Associates Ltd.
65 Martin Ross Ave.
Downsview, Ontario
Tel. (416) 636-4910
TWX. 610-492-2119

INTERNATIONAL

THE NETHERLANDS

Fluke Netherland N. V.
P. O. Box 5053
Tilburg, The Netherlands

UNITED KINGDOM

Fluke International Corp
P. O. Box 102
Watford-Herts, England

For information regarding service centers in other foreign locations, contact the nearest Sales and Service Representative in your area.

APPENDIX A

FEDERAL SUPPLY CODE FOR MANUFACTURERS

A-1. CODE TO NAME

A-2. The following five-digit code numbers are listed in numerical sequence along with the manufacturer's name and address to which the code has been assigned. The Federal Supply Code has been taken from Cataloging Handbook H 4-2, Code to Name.

00213	Sage Electronics Corp. Rochester, New York
00327	Welwyn International, Inc. Westlake, Ohio
00656	Aerovox Corp. New Bedford, Massachusetts
00779	AMP Inc. Harrisberg, Pennsylvania
01121	Allen-Bradley Co. Milwaukee, Wisconsin
01281	TRW Semiconductors Lawndale, California
01295	Texas Instruments, Inc. Semiconductor Components Div. Dallas, Texas
01686	RCL Electronics Inc. Manchester, New Hampshire
01730	Deleted
01884	Dearborn Electronics Inc. Orlando, Florida
02114	Ferroxcube Corp. Saugerties, New York
02606	Replaced by 15801
02660	Amphenol-Borg Elect. Corp. Broadview, Illinois
02799	Arco Capacitors, Inc. Los Angeles, California
03614	Replaced by 71400
03651	Replaced by 44655
03797	Eldema Corp. Compton, California
03877	Transitron Electronic Corp. Wakefield, Massachusetts
03888	Pyrofilm Resistor Co., Inc. Cedar Knolls, New Jersey
03911	Clairex Corp. New York, New York
03980	Muirhead Instruments, Inc. Mountainside, New Jersey
04009	Arrow Hart and Hegemen Electronic Company Hartford, Connecticut
04062	Replaced by 72136
04202	Replaced by 81312
04217	Essex Wire Corp Wire & Cable Div. Anaheim, California
04221	Aemco Div. of Midtex Inc. Mankato, Minnesota
04645	Replaced by 75376
04713	Motorola Semiconductor Products Inc. Phoenix, Arizona
05082	Replaced by 94154
05236	Jonathan Mfg. Co. Fullerton, California
05277	Westinghouse Electric Corp. Semiconductor Dept. Youngwood, Pennsylvania
05278	Replaced by 43543
05397	Union Carbide Corp. Electronics Div. Cleveland, Ohio
05571	Sprague Electric Co Pacific Div. Los Angeles, California
05704	Alac, Inc. Glendale, California
05820	Wakefield Engineering Ind. Wakefield, Massachusetts
06001	General Electric Company Capacitor Department Irmo, South Carolina
06136	Replaced by 63743
06473	Amphenol Space & Missile Sys. Chatsworth, California
06555	Beede Electrical Instrument Co. Penacook, New Hampshire
06739	Electron Corp. Littletown, Colorado
06743	Clevite Corp. Cleveland, Ohio
06751	Semcor Div. Components Phoenix, Arizona
06860	Gould National Batteries Inc. City of Industry, California
06980	Eitel-McCullough, Inc. San Carlos, California
07115	Replaced by 14674
07138	Westinghouse Electric Corp Electronic Tube Div. Elmira, New York
07263	Fairchild Semiconductor Div. of Fairchild Camera & Instrument Corp. Mountain View, California
07344	Bircher Co., Inc. Rochester, New York
07792	Lerma Engineering Corp Northampton, Massachusetts
07910	Continental Device Corp. Hawthorne, California
08530	Reliance Mica Corp. Brooklyn, New York
08792	CBS Electronics Semiconductor Operations-Div. of CBS Inc. Lowell, Massachusetts
08806	General Electric Co. Miniature Lamp Dept. Cleveland, Ohio
08863	Nylomatic Corp. Norrisville, Pennsylvania
08988	Skottie Electronics Inc. Archbald, Pennsylvania
09922	Burndy Corp. Norwalk, Connecticut
11237	Chicago Telephone of Calif. Inc. South Pasadena, California
11358	CBS Electronics Div. of CBS Inc. Newburyport, Massachusetts
11403	Best Products Co. Chicago, Illinois
11503	Keystone Mfg Div. of Avis Industrial Corp. Warren, Michigan
12014	Chicago Rivet & Machine Co. Bellwood, Illinois
12040	National Semiconductor Corp. Danburry, Connecticut
12060	Diodes, Inc. Chatsworth, California
12136	Philadelphia Handle Co. Camden, New Jersey
12323	Presin Co., Inc. Shelton, Connecticut
12327	Freeway Washer & Stamping Co. Cleveland, Ohio
12400	Replaced by 75042
12617	Hamlin Inc. Lake Mills, Wisconsin
12697	Clarostat Mfg. Co. Dover, New Hampshire
12749	James Electronics Chicago, Illinois

12856	Micrometals Sierra Madre, California
12954	Dickson Electronics Corp. Scottsdale, Arizona
13606	Sprague Electric Co. Transistor Div. Concord, New Hampshire
13839	Replaced by 23732
14099	Semtech Corp. Newbury Park, California
14193	California Resistor Corp. Santa Monica, California
14298	American Components, Inc. Conshohocken, Pennsylvania
14655	Cornell-Dubilier Electronics Newark, New Jersey
14674	Corning Glass Works Corning, New York
14752	Electro Cube Inc. San Gabriel, California
14869	Replaced by 96853
15636	Elec-Trol Inc. Northridge, California
15801	Fenwal Electronics Inc. Framingham, Massachusetts
15818	Amelco Semiconductor Div. of Teledyne Inc. Mountain View, California
15849	Useco, Inc. Mt. Vernon, New York
15909	Replaced by 17870
16332	Replaced by 28478
16473	Cambridge Scientific Ind. Inc. Cambridge, Maryland
16742	Paramount Plastics Downey, California
16758	Delco Radio Div. of General Motors Kokomo, Indiana
17069	Circuit Structures Lab. Upland, California
17856	Siliconix, Inc. Sunnyvale, California
17870	Daven-Div. of Thomas A. Edison Ind. --McGraw-Edison Co. Manchester, New Hampshire
18083	Deleted
18178	Vactec Inc. Maryland Heights, Missouri
18736	Voltronics Corp. Hanover, New Jersey
19429	Montronics, Inc. Seattle, Washington
19451	Perine Machinery & Supply Co. Seattle, Washington
19701	Electra Mfg. Co. Independence, Kansas
20584	Enochs Mfg. Co. Indianapolis, Indiana
22767	ITT Semiconductors Div. of ITT Palo Alto, California
23732	Tracor Rockville, Maryland
24248	Southco Div. of South Chester Corp. Lester, Pennsylvania
24655	General Radio Co. West Concord, Massachusetts
25403	Amperex Electronic Corp Semiconductor & Receiving Tube Division Slatersville, Rhode Island
28478	Deltrol Controls Corp. Milwaukee, Wisconsin
28520	Heyman Mfg. Co. Kenilworth, New Jersey
30323	Illinois Tool Works Inc. Chicago, Illinois
33173	General Electric Co. Tube Dept. Owensboro, Kentucky
37942	Mallory, P. R., & Co., Inc. Indianapolis, Indiana
38315	Honeywell Inc. Precision Meter Div. Manchester, New Hampshire
42498	National Company Melrose, Massachusetts
43543	Nytronics Inc. Transformer Co. Div. Alpha, New Jersey
44655	Ohmite Mfg. Co. Skokie, Illinois
49671	Radio Corp. of America New York, New York
49956	Raytheon Company Lexington, Maine
53021	Sangamo Electric Co. Springfield, Illinois
55026	Simpson Electric Company Chicago, Illinois
56289	Sprague Electric Co. North Adams, Massachusetts
58474	Superior Electric Co. Bristol, Connecticut
60399	Torrington Mfg. Co. Torrington, Connecticut
62460	Deleted
63743	Ward Leonard Electric Co. Mount Vernon, New York
64834	West Mfg. Co. San Francisco, California
65092	Weston Instruments Inc. Newark, New Jersey
66150	Winslow Tele-Tronics Inc. Asbury Park, New Jersey
70563	Amperite Company Union City, New Jersey
70903	Belden Mfg. Co. Chicago, Illinois
71002	Birnbach Radio Co., Inc. New York, New York
71400	Bussmann Mfg. Div. of McGraw-Edison Co. St. Louis, Missouri
71450	CTS Corp. Elkhart, Indiana
71468	ITT Cannon Electric Inc. Los Angeles, California
71482	Clare, C. P. & Co. Chicago, Illinois
71590	Centralab Div. of Globe Union Inc. Milwaukee, Wisconsin
71707	Coto Coil Co., Inc. Providence, Rhode Island
71744	Chicago Miniature Lamp Works Chicago, Illinois
71785	Cinch Mfg. Co. & Howard B. Jones Div. Chicago, Illinois
72005	Driver, Wilber B., Co. Newark, New Jersey
72092	Replaced by 06980
72136	Electro Motive Mfg. Co. Willimantic, Connecticut
72259	Nytronics Inc. Berkeley Heights, New Jersey
72354	Deleted
72619	Dialight Corp Brooklyn, New York
72653	G. C. Electronics Rockford, Illinois
72665	Replaced by 90303
72794	Dzus Fastener Co., Inc. West Islip, New York
72928	Gudeman Co. Chicago, Illinois
72982	Erie Tech. Products Inc. Erie, Pennsylvania
73138	Beckman Instruments Inc. Helipot Division Fullerton, California
73293	Hughes Aircraft Co. Electron Dynamics Div. Newport Beach, California
73445	Amperex Electronic Corp. Hicksville, New York
73559	Carling Electric Inc. Hartford, Connecticut
73586	Circle F Industries Trenton, New Jersey
73734	Federal Screw Products, Inc. Chicago, Illinois
73743	Fischer Special Mfg. Co. Cincinnati, Ohio
73899	JFD Electronics Co. Brooklyn, New York
73949	Guardian Electric Mfg. Co. Chicago, Illinois
74199	Quam Nichols Co. Chicago, Illinois
74217	Radio Switch Corp. Marlboro, New Jersey
74276	Signalite Inc. Neptune, New Jersey
74306	Piezo Crystal Co. Carlisle, Pennsylvania
74542	Hoyt Elect. Instr. Works Penacook, New Hampshire
74970	Johnson, E. F., Co. Waseca, Minnesota
75042	IRC Inc. Philadelphia, Pennsylvania
75376	Kurz-Kasch, Inc. Dayton, Ohio
75382	Kulka Electric Corp. Mt. Vernon, New York
75915	Littleluse Inc. Des Plaines, Illinois
76854	Oak Mfg. Co. Crystal Lake, Illinois
77342	Potter & Brumfield Div. of Amer. Machine & Foundry Princeton, Indiana
77969	Rubbercraft Corp. of Calif. LTD. Torrance, California

78189 Shakeproof
Div. of Illinois Tool Works
Elgin, Illinois

78277 Sigma Instruments, Inc.
South Braintree, Massachusetts

78488 Stackpole Carbon Co.
St. Marys, Pennsylvania

78553 Tinnerman Products
Cleveland, Ohio

79136 Waldes Kohinoor Inc.
Long Island City, New York

79497 Western Rubber Company
Goshen, Indiana

79963 Zierick Mfg. Corp.
New Rochelle, New York

80031 Mepco
Div. of Sessions Clock Co.
Morristown, New Jersey

80145 API Instruments Co.
Chesterland, Ohio

80183 Sprague Products
North Adams, Massachusetts

80294 Bourns Inc.
Riverside, California

80583 Hammarlund Co., Inc.
Mars Hill, North Carolina

80640 Stevens, Arnold Inc.
Boston, Massachusetts

81073 Grayhill Inc.
La Grange, Illinois

81312 Winchester Electronics
Div. of Litton Industries
Oakville, Connecticut

81439 Therm-O-Disc Inc.
Mansfield, Ohio

81483 International Rectifier Corp.
El Segundo, California

81590 Korry Mfg. Co.
Seattle, Washington

82376 Deleted

82389 Switchcraft Inc.
Chicago, Illinois

82415 Price Electric Corp.
Frederick, Maryland

82872 Roanwell Corp.
New York, New York

82877 Rotron Mfg. Co., Inc.
Woodstock, New York

82879 ITT Wire & Cable Div.
Pawtucket, Rhode Island

83003 Varo Inc.
Garland, Texas

83298 Bendix Corp.
Electric Power Division
Eatontown, New Jersey

83330 Smith, Herman H., Inc.
Brooklyn, New York

83478 Rubbercraft Corp. of America
New Haven, Connecticut

83594 Burroughs Corp.
Electronic Components Div.
Plainfield, New Jersey

83740 Union Carbide Corp.
Consumer Products Div.
New York, New York

84171 Arco Electronics, Inc.
Great Neck, New York

84411 TRW
Ogallala, Nebraska

86577 Precision Metal Products
Stoneham, Massachusetts

86684 Radio Corp. of America
Electronic Components & Devices
Harrison, New Jersey

86689 Deleted

87034 Marco-Oak Inc.
Anaheim, California

88419 Use 14655

88690 Replaced by 04217

89536 Fluke, John Mfg. Co., Inc.
Seattle, Washington

89730 Replaced by 08806

90201 Mallory Capacitor Co.
Indianapolis, Indiana

90215 Best Stamp & Mfg. Co.
Kansas City, Missouri

90211 Square D Co.
Chicago, Illinois

90303 Mallory Battery Co.
Tarrytown, New York

91293 Johanson Mfg. Co.
Boonton, New Jersey

91407 Replaced by 58474

91637 Dale Electronics Inc.
Columbus, Nebraska

91662 Elco Corp.
Willow Grove, Pennsylvania

91737 Gremar Mfg. Co., Inc.
Wakefield, Massachusetts

91802 Industrial Devices, Inc.
Edgewater, New Jersey

91836 King's Electronics
Tuckahoe, New York

91929 Honeywell Inc.
Micro Switch Div.
Freeport, Illinois

91934 Miller Electric Co., Inc.
Pawtucket, Rhode Island

93332 Sylvania Electric Products
Semiconductor Products Div.
Woburn, Massachusetts

94145 Replaced by 49956

94154 Tung-Sol
Div. of Wagner Electric Corp.
Newark, New Jersey

95146 Alco Electronics Products Inc.
Lawrence, Massachusetts

95263 Leecraft Mfg. Co.
Long Island City, New York

95264 Replaced by 98278

95275 Vitramon Inc.
Bridgeport, Connecticut

95303 Radio Corp. of America
Solid State & Receiving Tube Div.
Cincinnati, Ohio

95354 Methode Mfg. Corp.
Rolling Meadows, Illinois

95712 Dage Electric Co., Inc.
Franklin, Indiana

95987 Weckesser Co., Inc.
Chicago, Illinois

96733 San Fernando Electric Mfg. Co.
San Fernando, California

96853 Rustrak Instrument Co.
Manchester, New Hampshire

96881 Thomson Industries, Inc.
Manhasset, New York

97540 Master Mobile Mounts
Div. of Whitehall Electronics Corp.
Los Angeles, California

97913 Industrial Electronic Hdware Corp.
New York, New York

97945 White, S. S. Co.
Plastics Div.
New York, New York

97966 Replaced by 11358

98094 Replaced by 49956

98278 Microdot Inc.
Pasadena, California

98291 Sealectro Corp.
Conhex Div
Mamaroneck, New York

98388 Accurate Rubber & Plastics
Culver City, California

98743 Replaced by 12749

98925 Deleted

99120 Plastic Capacitors, Inc.
Chicago, Illinois

99217 Southern Electronics Corp.
Burbank, California

99515 Marshall Industries
Capacitor Div.
Monrovia, California

Revised August 1, 1968
Using H4-1 and H4-2
Dated June , 1968

WARRANTY

The JOHN FLUKE MFG. CO., INC. warrants each instrument manufactured by them to be free from defects in material and workmanship. Their obligation under this Warranty is limited to servicing or adjusting an instrument returned to the factory for that purpose, and to making good at the factory any part or parts thereof; except tubes, fuses, choppers and batteries, which shall, within one year after making delivery to the original purchaser, be returned by the original purchaser with transportation charges prepaid, and which upon their examination shall disclose to their satisfaction to have been thus defective. If the fault has been caused by misuse or abnormal conditions of operation, repairs will be billed at a nominal cost. In this case, an estimate will be submitted before work is started, if requested.

If any fault develops, the following steps should be taken.

1. Notify the John Fluke Mfg. Co., Inc., giving full details of the difficulty, and include the Model number, type number, and serial number. On receipt of this information, service data or shipping instructions will be forwarded to you.

2. On receipt of the shipping instructions, forward the instrument prepaid, and repairs will be made at the factory. If requested, an estimate of the charges will be made before the work begins, provided the instrument is not covered by the Warranty.

SHIPPING

All shipments of John Fluke Mfg. Co., Inc. instruments should be made via Railway Express prepaid. The instrument should be shipped in the original packing carton; or if it is not available, use any suitable container that is rigid. If a substitute container is used, the instrument should be wrapped in paper and surrounded with at least four inches of excelsior or similar shock-absorbing material.

CLAIM FOR DAMAGE IN SHIPMENT

The instrument should be thoroughly inspected immediately upon receipt. All material in the container should be checked against the enclosed packing list. The manufacturer will not be responsible for shortages against the packing sheet unless notified immediately. If the instrument fails to operate properly, or is damaged in any way, a claim should be filed with the carrier. A full report of the damage should be obtained by the claim agent, and this report should be forwarded to John Fluke Mfg. Co., Inc. Upon receipt of this report you will be advised of the disposition of the equipment for repair or replacement. Include the model number, type number, and serial number when referring to this instrument for any reason.

The John Fluke Mfg. Co., Inc. will be happy to answer all application questions which will enhance your use of this instrument. Please address your requests to:

JOHN FLUKE MFG. CO., INC., P. O. BOX 7428, SEATTLE 33, WASHINGTON

SALES & SERVICE REPRESENTATIVES

ALABAMA
HUNTSVILLE
BCS Associates, Inc.
3322 South Memorial Parkway
Tel. (205) 881-6220
Zip 35801

ALASKA
SEATTLE
Instrument Specialists, Inc.
5950 Sixth Ave. South
Suite 106
Seattle, Washington 98108
Tel. (206) 767-4260

ARIZONA
PHOENIX
Barnhill Associates
4900 E. Indian School Road
Tel. (602) 959-2115
Zip 85251

CALIFORNIA
LOS ANGELES
Instrument Specialists, Inc.
1109 S. Central Ave.
Glendale, California 91204
Tel. (213) 245-9404

SAN FRANCISCO
Instrument Specialists, Inc.
2359 De La Cruz
Santa Clara, California 95050
Tel. (408) 244-1505

SAN DIEGO
Instrument Specialists, Inc.
10459 A Rosella Street
San Diego, California 92121
Tel. (714) 453-1833

COLORADO
DENVER
Barnhill Associates
1170 S. Sheridan Blvd.
Tel. (303) 934-5505
Zip 80226

CONNECTICUT
HARTFORD
Instrument Representatives, Inc.
P.O. Box 165
Glastonbury, Connecticut 06033
Tel. (203) 633-0777

FLORIDA
ORLANDO
BCS Associates, Inc.
940 N. Fern Creek Ave.
Tel. (305) 843-1510
Zip 32803

HAWAII
HONOLULU
Industrial Electronics, Inc.
646 Queen Street
Tel. (808) 506-095
Zip 96813

ILLINOIS
CHICAGO
Cozzens & Cudahy, Inc.
9501 W. Devon Ave.
Rosemont, Illinois 60018
Tel. (312) 825-1144

INDIANA
INDIANAPOLIS
Cozzens & Cudahy, Inc.
647 Mulford Crt.
Tel. (317) 244-2456
Zip 46234

MARYLAND
BALTIMORE
Electronic Marketing Assoc.
11501 Huff Court
Kensington, Maryland 20795
Tel. (301) 881-5300

MASSACHUSETTS
BOSTON
Instrument Representatives, Inc.
1046 Massachusetts Avenue
Arlington, Massachusetts 02174
Tel. (617) 646-1034

MICHIGAN
DETROIT
Technitron, Inc.
13657 Grand River Ave.
Tel. (313) 838-7324
Zip 48227

MINNESOTA
MINNEAPOLIS
Cozzens & Cudahy, Inc.
7710 Computer Ave.
Tel. (612) 920-1022
Zip 55435

MISSOURI
ST. LOUIS
Cozzens & Cudahy, Inc.
P.O. Box 10013
Lambert Field 63145
Tel. (314) 423-1234

NEW JERSEY
NEWARK
SBM Associates, Inc.
1519 Stuyvesant Avenue
Union, New Jersey 07083
Tel. (201) 687-8737

NEW MEXICO
ALBUQUERQUE
Barnhill Associates
827 Pennsylvania N.E.
Tel (505) 265-7766
Zip 87110

NEW YORK
NEW YORK
SBM Associates, Inc.
28 Hobby Street
Pleasantville, New York 10570
Tel. (914) 769-1811

LONG ISLAND
SBM Associates, Inc.
528 Old Country Road
Plainview, Long Island 11803
Tel. (516) 433-1421

ROCHESTER
SBM Associates, Inc.
800 Linden Avenue
Tel. (716) 381-8330
Zip 14625

SYRACUSE
SBM Associates, Inc.
138 Pickard Bldg.
5858 E. Molloy Road
Tel. (315) 454-9377
Zip 13211

NORTH CAROLINA
GREENSBORO
BCS Associates, Inc.
1039 E. Wendover Avenue
Tel. (919) 273-1918
Zip 27405

OHIO
CLEVELAND
Technitron, Inc.
23203 Lorain Road
North Olmsted, Ohio 44070
Tel. (216) 734-0960

DAYTON
Technitron, Inc.
1250 W. Dorothy Lane
Tel. (513) 298-9964
Zip 45409

OREGON
SEATTLE
Instrument Specialists, Inc.
5650 Sixth Ave. South
Suite 106
Seattle, Washington 98108
Tel. (206) 767-4260

PENNSYLVANIA
PHILADELPHIA
Electronic Marketing Assoc.
210 Goddard Blvd. – Suite 100
King of Prussia, Pennsylvania
Tel. (215) 248-5050
Zip 19406

PITTSBURGH
Technitron, Inc.
114 Spring Grove Road
Tel. (412) 371-1231
Zip. 15235

TEXAS
DALLAS
Barnhill Associates
Ste. 220
312 N. Central Express Way
Richardson, Texas 75080
Tel. (214) 231-2573

HOUSTON
Barnhill Associates
Suite 332
3810 Westheimer
Tel. (713) 621-0040
Zip 77027

WASHINGTON
SEATTLE
Instrument Specialists, Inc.
5950 Sixth Ave. South
Suite 106
Seattle, Washington 98108
Tel. (206) 767-4260

WASHINGTON, D.C.
Electronic Marketing Associates
11501 Huff Court
Kensington, Maryland 20795
Tel. (301) 881-5300

CANADA

BRITISH COLUMBIA
VANCOUVER
Allan Crawford Associates, Ltd.
721 Aldford Ave.
Annacis Industrial Estate
New Westminister
Tel. (604) 524-1161

ONTARIO
OTTAWA, 3
Allan Crawford Associates, Ltd.
376 Churchill Avenue – Suite 106
Tel. (613) 725-3354

TORONTO
Allan Crawford Associates, Ltd.
65 Martin Ross Avenue
Downsview, Ontario
Tel. (416) 636-4910

QUEBEC
MONTREAL, 8
Allan Crawford Associates, Ltd.
1285 Hodge Street
Tel. (514) 747-9849

INTERNATIONAL REPRESENTATIVES

AUSTRALIA
Elmeasco Instruments
7 Chard Road
P.O. Box 334
Brookvale, N.S.W., Australia 2100

Elmeasco Instruments (Pty.) Ltd.
P.O. Box 213
Mt. Waverley, Vic. Australia 3149

AUSTRIA
Omni Ray AG
Tech. Beratung
Mollardgasse 54
Vienna VI, Austria

BELGIUM
C.N. Rood S/A
30 Rue Leon Frederic
Brussels 4, Belgium

DENMARK
Tage Olsen A/S
1, Ronnegade
Copenhagen, Denmark

FINLAND
Oy Findip AB
Postbox 52025
Helsinki 25, Finland

FRANCE
Radio Equipment Antares
9, Rue Ernest Cognac Q
92 Levallois
Perret, France

HONG KONG
Gilman & Co. Ltd.
P.O. Box 56
Hong Kong, Hong, Kong

ISRAEL
R.D.T. Electronics Engineering Ltd.
P.O. Box 21082
Tel-Aviv, Israel

ITALY
Elettronucleonica s.p.a.
7, P.zza DeAngeli
20146 Milano, Italy

JAPAN
Toyo Trading Co., Ltd.
P.O. Box 5014
Tokyo Japan

Toyo Trading Co., Ltd.
2-38 Junkeicho-dori minami-ku
Osada, Japan

KOREA
M.-C International
I.P.O. Box 1355
Seoul, Korea

MALAYSIA
O'Connor's (Pte) Limited
P.O. Box 1197
Kota, Kinabalu
East Malaysia

O'Connor's (Pte) Limited
P.O. Box 91
Petaling Jaya
West Malaysia

THE NETHERLANDS
C.N. Rood N.V.
Post Office Box 4542
Rijswijk (Z.H.) The Netherlands

Fluke (Nederland) N.V.
Post Office Box 5053
Tilburg, The Netherlands

NORWAY
Morgenstierne & Co. A/S
P.B. 6688 Rodelokka
Oslo 6, Norway

OKINAWA
RYUKYU ISLANDS
Baxter Trading Co.
P.O. Box 26
Koza, Okinawa
Ryukyu Islands

PHILIPPINES
T. J. Wolff
2246 Pasong Tamo
Makati, Rizal
Manila, Philippines

SINGAPORE
O'Connor's (Pte) Limited
Maybank House
Robinson Road
Singapore

SOUTH AFRICA
K. Baker (Pty.) Ltd.
P.O. Box 1257
Johannesburg, So. Africa

K. Baker (Pty.) Ltd.
P.O. Box 3641
Cape Town, So. Africa

K. Baker (Pty.) Ltd.
P.O. Box 2143
Durban, Natal, So. Africa

K. Baker (Pty.) Ltd.
P.O. Box 210
Swaziland, So. Africa

SPAIN
REMA
General Sanjurjo, 18
Madrid, Spain

SWEDEN
Erik Ferner AB
Box 56
161.26 Stockholm-Bromma,
Sweden

SWITZERLAND
Omni Ray AG
Dofourstrasse 56
8008 Zurich, Switzerland

TAIWAN
Heighten Trading Co., Ltd.
P.O. 1408
Taipei, Taiwan

THIALAND
G. Simon Radio Ltd.
30 Patpong Avenue
Suriwong
Bangkok, Thailand

THE UNITED KINGDOM
Fluke International Corp.
Garnett Close
Watford, England
WD2-4TT

WEST GERMANY
Rohde & Schwarz Vertriebs - Gmbh
5000 Koein
Hohe Strasse 160-168
West Germany

Rohde & Schwarz Handels - Gmbh
1000 Berlin 10
Ernst - Reuter - Platz 10
West Germany

Rohde & Schwarz Vertriebs - Gmbh
2000 Hamburg 50
Grosse Bergstrasse 213-217
West Germany

Rohde & Schwarz Vertriebs - Gmbh
7500 Kalsruhe
Kriegsstrasse 39
West Germany

Rohde & Schwarz Vertriebs - Gmbh
8000 Muenchen
Dachauer Strasse 109
West Germany

In Europe contact FLUKE NEDERLAND, N. V., Post Office Box 5053, Tilburg, The Netherlands

List of Factory Authorized Service Centers

ARIZONA

PHOENIX

Arizona Standards Laboratory
4430 N. 19th Ave.
Tel. (602) 264-9351

CALIFORNIA

LOS ANGELES

Instrument Specialists, Inc.
P. O. Box 39908
2870 Los Feliz Place
Tel. (213) 665-5181
TWX: 910-321-3914

COLORADO

BOULDER

Ball Brothers Research Corp.
Standardization Laboratory
Tel. (303) 444-5300
TWX: 910-940-3241

FLORIDA

ORLANDO

BCS Associates, Inc.
P. O. Box 6578
940 N. Fern Creek Ave.
Tel. (305) 425-2764
TWX. 810-850-0185

HAWAII

HONOLULU

Industrial Electronics
P. O. Box 135
646 Queen Street
Tel. (808) 506-095
TWX. 63238

MARYLAND

KENSINGTON

Electronic Marketing Associates
11501 Huff Court
Tel. (301) 946-0300
TWX. 710-825-9645

MASSACHUSETTS

ARLINGTON

Instrument Representatives, Inc.
1046 Massachusetts Ave.
Tel. (617) 646-1034

NEW MEXICO

ALBUQUERQUE

EG & G Standards and Calibration Laboratory
P. O. Box 4339, Station A
933 Bradbury Drive S. E.
Tel. (505) 842-4084

NEW YORK

PLEASANTVILLE

SBM Associates
28 Hobby Street
Tel. (914) 769-1811
TWX. 710-572-2193

ROCHESTER

SBM Associates
800 Linden Ave.
Tel. (716) 381-8330
TWX. 510-253-6145

OHIO

CLEVELAND

Honeywell Metrology Service
1001 E. 55th St.
Tel. (216) 881-0300

FAIRBORN

Honeywell Metrology Service
600 East Dayton Dr.
Tel. (513) 878-2551

TEXAS

GARLAND

Tucker Electronics Company
326 Kirby Street
Tel. (214) 272-3404

HOUSTON

Linear Standards Laboratory
8207 Millet
Tel. (713) 923-2796

UTAH

SALT LAKE CITY

Stabro Laboratory
23 Kensington Ave.
Tel. (801) 467-8011

CANADA

TORONTO

Allen Crawford Associates Ltd.
65 Martin Ross Ave.
Downsview, Ontario
Tel. (416) 636-4910
TWX. 610-492-2119

INTERNATIONAL

THE NETHERLANDS

Fluke Netherland N. V.
P. O. Box 5053
Tilburg, The Netherlands

UNITED KINGDOM

Fluke International Corp
P. O. Box 102
Watford-Herts, England

For information regarding service centers in other foreign locations, contact the nearest Sales and Service Representative in your area.

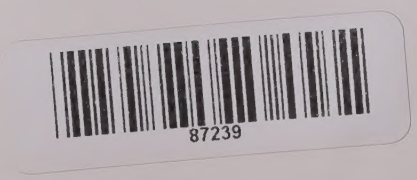
87239